




# 1000-BQ2/96

## HOT HOLDING BANQUET CARTS



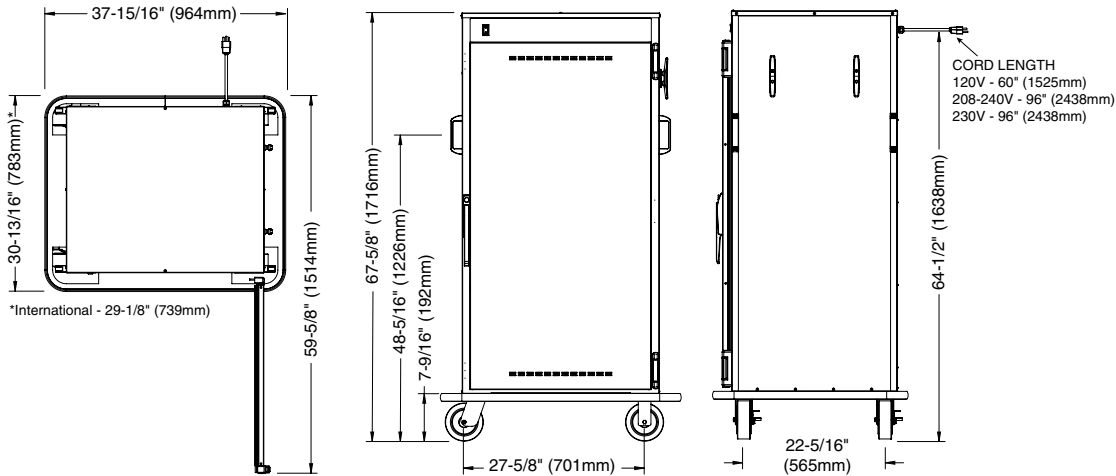




<b>DIMENSIONS:</b> H x W x D	
<b>EXTERIOR:</b>	67-5/8" x 37-15/16" x 30-13/16" (1716mm x 964mm x 783mm)
<b>INTERIOR:</b>	52-7/8" x 28-1/4" x 25-1/2" (1342mm x 717mm x 647mm)

<b>WEIGHT</b>	
<b>NET</b>	322 lbs (146 kg)
<b>SHIP</b>	415 lbs (188 kg)
<b>CARTON DIMENSIONS:</b> (L x W x H)	
43" x 33" x 75" (1092mm x 838mm x 1905mm)	

<b>INSTALLATION REQUIREMENTS</b>	
Cabinet must be installed level. It must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.	

<b>CLEARANCE REQUIREMENTS</b>	
Full perimeter bumper accommodates all clearance requirements.	

<b>OPTIONS &amp; ACCESSORIES</b>	
<b>Plate Carriers, chrome plated</b> (EACH HOLD 4 PREPLATED MEALS)	
<input type="checkbox"/> <b>Uncovered "P" Carriers</b> <b>DC-2868</b>	Plate dia: 10" (254mm) max. • 7-3/4" (197mm) min. Vertical rung spacing: 2-5/8" (67mm) CAPACITY: 24 CARRIERS, 96 PREPLATED MEALS
<input type="checkbox"/> <b>Covered "C" Carriers</b> <b>DC-2869</b>	Plate dia: 9-3/4" (248mm) max. • 7-3/4" (197mm) min. Vertical clearance between top and bottom carrier: 11-5/8" (295mm) CAPACITY: 24 CARRIERS, 96 PREPLATED MEALS
<input type="checkbox"/> <b>Door Lock with Key</b> <b>LK-22567</b>	
<input type="checkbox"/> <b>Shelf Support</b> (2 required for each shelf) <b>1061</b>	
<input type="checkbox"/> <b>Shelf Support Clip</b> (1 required for each shelf) <b>11533</b>	
<input type="checkbox"/> <b>Wire Shelf, chrome plated</b> <b>SH-2835</b>	

<b>ELECTRICAL</b>						
VOLTAGE	PHASE	CYCLE/HZ	AMPS	kW	CORD & PLUG	
120	1	60	12.5	1.5		NEMA 5-15P 15A - 125V PLUG
208	1	60	5.9	1.2		NEMA 6-15P 15A - 250V PLUG
240	1	60	6.8	1.6		CEE 7/7 PLUG RATED 250V
230	1	50/60	6.5	1.5		CH2-16P PLUG RATED 250V
						BS 1363 PLUG RATED 250V

<b>CAPACITY</b>	
240 lbs (109 kg) MAXIMUM	
VOLUME MAXIMUM: 150 QUARTS (190 LITERS)	
<b>PLATES:</b> (without plate carriers)	
— 8" - 8-3/4" (203mm - 222mm) with covers: 128 (8 per shelf)	
— 9" - 10" (229mm - 254mm) with covers: 96 (6 per shelf)	
— 10-1/4" - 12-3/4" (260mm - 324mm) with covers: 64 (4 per shelf)	
LARGER DIAMETER ITEMS WILL RESULT IN REDUCED PLATE CAPACITIES	
<b>PANS:</b> Full-size and half-size pan combinations (per shelf)	
— 12" x 20" (530mm x 325mm - GN 1/1): 2	
— 12" x 10" (265mm x 325mm - GN 1/2): 4	
ADDITIONAL WIRE SHELVES WITH SUPPORT CLIPS WILL ACCOMMODATE VARIOUS COMBINATIONS OF 2-1/2" (65mm), 4" (100mm) OR 6" (150mm) DEEP PANS	
<b>SHELF CAPACITY*:</b> (per shelf, without covers)	
— Shelves maximum: 16      SPACING ON CENTERS 3-5/32" (80mm)	